

ALLEGRO

LED Surface/Suspended Linear Fitting



Features & Highlights


- IP44 Ingress Protection
- Smooth, curved, wipe-clean diffuser
- Powder-coated steel body
- Fixed injection moulded end caps
- Powered by integral Tridonic driver
- 5 Year warranty (T's & C's apply)
- UK support

Options & Accessories

DALI	/DALI
Emergency	/EM
Suspension kit	/SUSKIT
Self Test EM	/STEM

Dimensions

Side

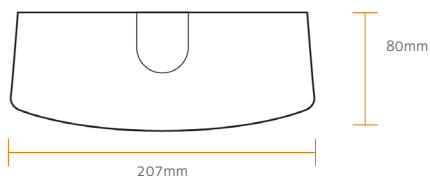

Part Codes

Part Code	Description	Watts	Lumens	Colour temp	LL/cW
ALL-1.2M-28-3800-840-WHI	Allegro Surface Batten 1.2M 28w ~3,800Lm ~118Lm/CW CRI80 4000K White	28	3800	840	118
ALL-1.2M-16-2400-840-WHI	As above, 16w ~2,400Lm ~127Lm/CW	16	2400	840	127
ALL-1.2M-35-4700-840-WHI	As above, 35w ~4,700Lm ~118Lm/CW	35	4700	840	118
ALL-1.2M-29-5275-840-WHI	As above, 1.5M 29w ~4,300Lm ~126Lm/CW	29	4300	840	126
ALL-1.2M-36-4300-840-WHI	As above, 1.5M 36w ~5,275Lm ~130Lm/CW	36	5275	840	130
ALL-1.2M-46-6600-840-WHI	As above, 1.5M 46w ~6,600Lm ~122Lm/CW	46	6600	840	122

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.