


ARCO BULKHEAD

Wall-mounted Luminaire with Asymmetrical Lens

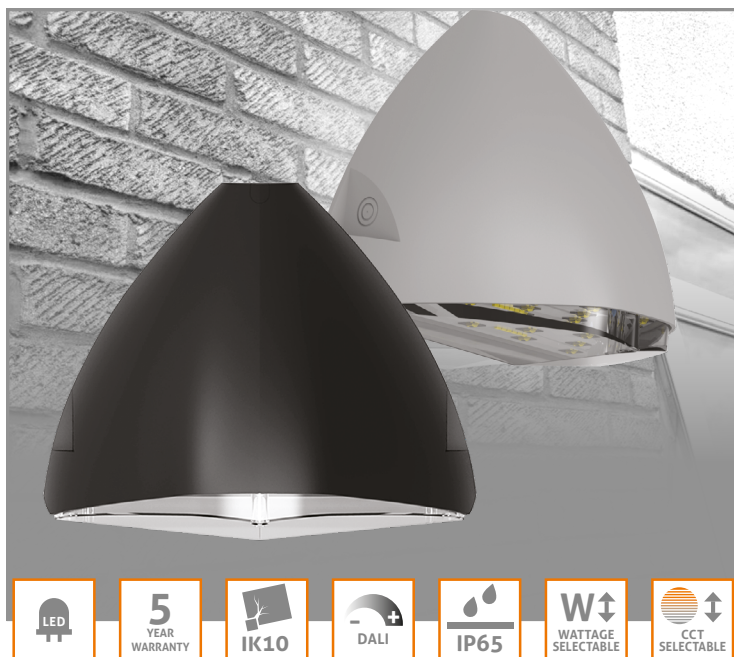


Features & Highlights

- IP66 ingress protection
- IK10 impact protection
- Asymmetrical Lens
- Adjustable Output and Colour Temperature
- Screwless Appearance Post Installation
- Die-cast Aluminium Housing
- Polycarbonate Diffuser
- Wall Mounted
- 2 Colour Options
- 5 year warranty (T's & C's apply)
- UK Support

Options & Accessories

DALI	/DALI
Emergency	/EM
Microwave sensor	/MWSN
Open Area optic	/OA
Asymmetrical optic	/AS
Black (RAL9005)	/BLK
Anthracite (RAL7016)	/ANT
Grey White (RAL9002)	/GRY

Technical Drawing

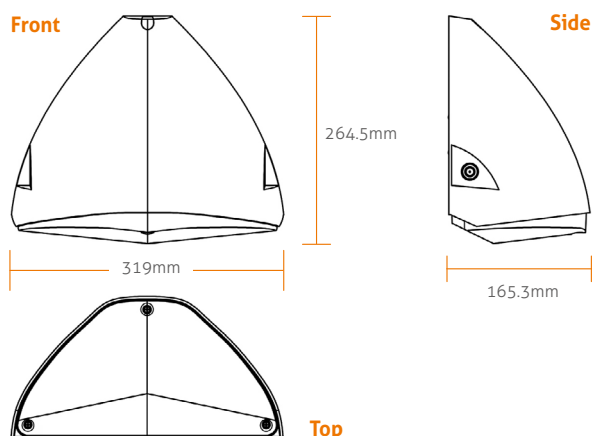

Part Codes

Part Code	Description	Circuit Watts	Luminaire Lumens
ARC-320-3VW-3VL-OA-82CCT-BLK	Arco Surface Bulkhead Variable 13w/18w/28w Variable ~1,700/~2,500/~3,500Lm Open Area Optic CRI80 3000K/4000K IP65 320x265mm Black +nonST EM	13 / 18 / 28	1700/2500/3500
ARC-320-3VW-3VL-AS-82CCT-BLK	As above, Asymmetrical Optic	13 / 18 / 28	1700/2500/3500

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.