


FORZA

High Output High / Low Bay



Dimensions

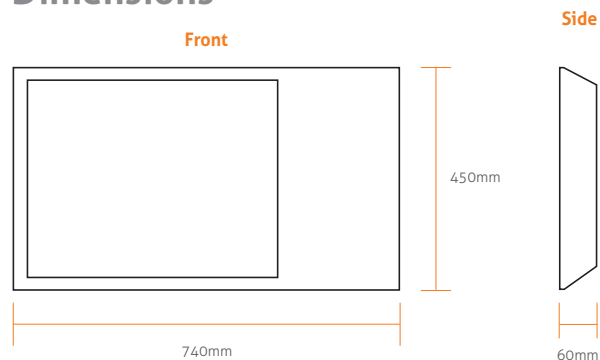

Key Features

- IP40 gasketed front face
- IK10 Impact protection
- Anti-glare diffuser
- Suspended or surface mount
- Available in 2 colour temperatures
- 100,000hr rated Tridonic Industry Drivers
- Option for wireless controls available on request
- 5 year warranty (T's & C's apply)
- UK support

Options & Accessories

Integral EM	/EM
Self Test EM	/STEM
DALI	/DALI
Ingress Protection 54	/IP54
High Bay PIR up to 20m	/HBSN
Low Bay PIR up to 7m	/LBSN
DALI High Bay PIR up to 20m	/HBSN-DD
DALI Low Bay PIR up to 7m	/LBSN-DD
Surface mount L-bracket	/SMB-TYPE-L-KIT
Surface mount Top Hat Bracket Pair	/SMB-TYPE-TOPHAT-KIT

Part Codes

Part Code	Description	Watts	Lumens	LL/cW	Colour temp
FOR-86-12060-AGD-840-WHI	Forza High Bay 86w ~12,060Lm ~141Lm/CW Anti-Glare Diffuser CRI80 4000K Surface/Suspended White	86	12,060	141	840
FOR-114-16100-AGD-840-WHI	As above, 114w ~16,100Lm ~141Lm/CW	114	16,100	151	840
FOR-114-16100-AGD-850-WHI	As above, 114w ~16,100Lm ~141Lm/CW 5000K	114	16,100	149	850
FOR-143-20200-AGD-850-WHI	As above, 143w ~20,200Lm ~140Lm/CW 5000K	143	20,200	140	850
FOR-171-24000-AGD-850-WHI	As above, 171w ~24,000Lm ~140Lm/CW 5000K	140	24,000	140	850

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.



Terms & Conditions

All goods supplied are subject to our Standard Terms of Business, available on request. E&OE.