

POCO DOWN LIGHT

Recessed Down Light 130mm


5
YEAR
WARRANTY



DALI




IP20



UGR

Dimensions & Weight

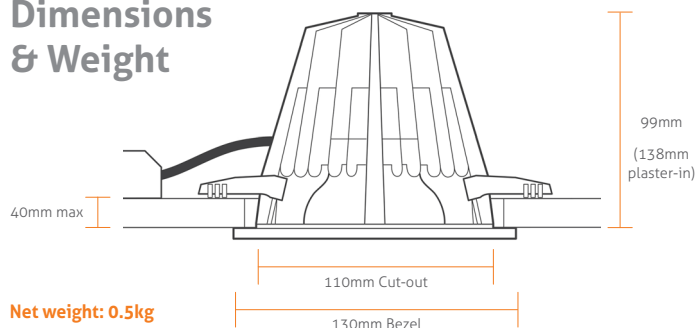

Features & Highlights

- IP20 ingress protection
- Tridonic Advance LED and Driver combination
- Low-glare UGR19 compliant
- Height <100mm using optimised passive thermodynamics
- Multi-faceted 40° reflector supplied as standard
- Decorative and IP65 bezel options
- 5 Year warranty (T's & C's apply)
- UK support

Options & Accessories

25° multifaceted reflector	/MF25
60° multifaceted reflector	/MF60
40° Specular reflector	/SP40
50° satin reflector	/SA50
Emergency - remote indicator	/EM
DALI	/DALI

Part Codes

Part Code	Description	Circuit Watts	Lumens	LU/CW	Colour Temp
POC-130-8-1000-MF40D-830-WHI	Poco 130mm Recessed Downlight 110mm Cutout 8w ~1,000Lm 125Lm/CW 40Degree Multi-faceted Reflector CRI80 3000K White	8	~ 1,025Lm	125	830
POC-130-8-1050-MF40D-840-WHI	As above, 8w ~1,050Lm 134Lm/CW 4000K	8	~ 1075Lm	131	840
POC-130-14-1750-MF40D-830-WHI	As above, 14w ~1,750Lm 130Lm/CW 3000K	14	~ 1725Lm	130	830
POC-130-14-1825-MF40D-840-WHI	As above, 14w ~1,825Lm 135Lm/CW 4000K	14	~ 1800Lm	135	840
POC-130-19-2425-MF40D-830-WHI	As above, 19w ~2,425Lm 128Lm/CW 3000K	19	~ 2375Lm	128	830
POC-130-19-2525-MF40D-840-WHI	As above, 19w ~2,525Lm 133Lm/CW 4000K	19	~ 2450Lm	133	840
POC-130-27-3250-MF40D-830-WHI	As above, 28w ~3,250Lm 120Lm/CW 3000K	27	~ 3175Lm	120	830
POC-130-27-3375-MF40D-840-WHI	As above, 28w ~3,375Lm 125Lm/CW 4000K	27	~ 3275Lm	125	840
POC-130-40-4375-MF40D-830-WHI	As above, 40w ~4,375Lm 109Lm/CW 3000K	40	~ 4375Lm	109	830
POC-130-40-4550-MF40D-840-WHI	As above, 40w ~4,550Lm 114Lm/CW 3000K	40	~ 4550Lm	114	840

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.