

# POCO DOWN LIGHT

## Recessed Down Light 175mm



### Features & Highlights



- IP54 ingress protection
- IK08 Impact Protection
- Colour selectable
- Aluminium heatsink provides excellent thermals
- Multi-faceted 80° reflector supplied as standard
- Interchangeable reflectors and trims
- 5 Year warranty (T's & C's apply)
- UK support

### Options & Accessories

DALI	/DALI
Self test EM	/STEM
80° multi-faceted reflector	/MF80D
80° specular reflector	/SP80D

### Dimensions & Weight

Side

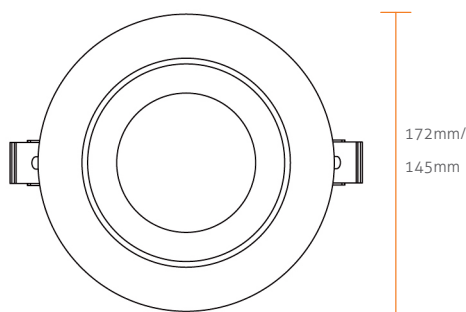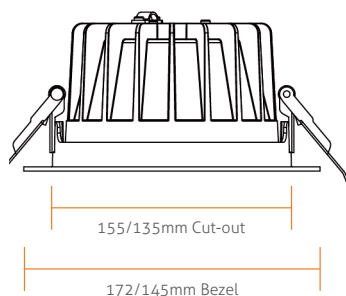

Net weight: 0.5 / 0.75kg

### Part Codes

Part Code	Description	C. Watts	Lumens	LI/CW	Colour Temp
POC-175-IP54-22-2425-MF80D-83CCT-WHI	Poco <b>172mm</b> IP54 Recessed Downlight <b>155mm Cutout</b> <b>22w ~2,425Lm ~110Lm/CW</b> Multi Faceted 80Degree Reflector CRI80 3000K/4000K/6000K White Bezel	22	~ 2,425Lm	110	830/840/860
POC-175-IP54-16-1750-MF80D-83CCT-WHI	As above, <b>16w ~1,750Lm 110Lm/CW</b>	16	~ 1,750Lm	110	830/840/860
POC-145-IP54-12-1325-MF80D-83CCT-WHI	As above, <b>145mm 135mm cutout 12w ~1,325Lm 110Lm/CW</b>	12	~ 1,325Lm	110	830/840/860

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.



### Terms & Conditions

All goods supplied are subject to our Standard Terms of Business, available on request. E&OE.

[bblighting.co.uk](http://bblighting.co.uk)

Version: 2501