



POCO DOWN LIGHT

Recessed Down Light 195mm

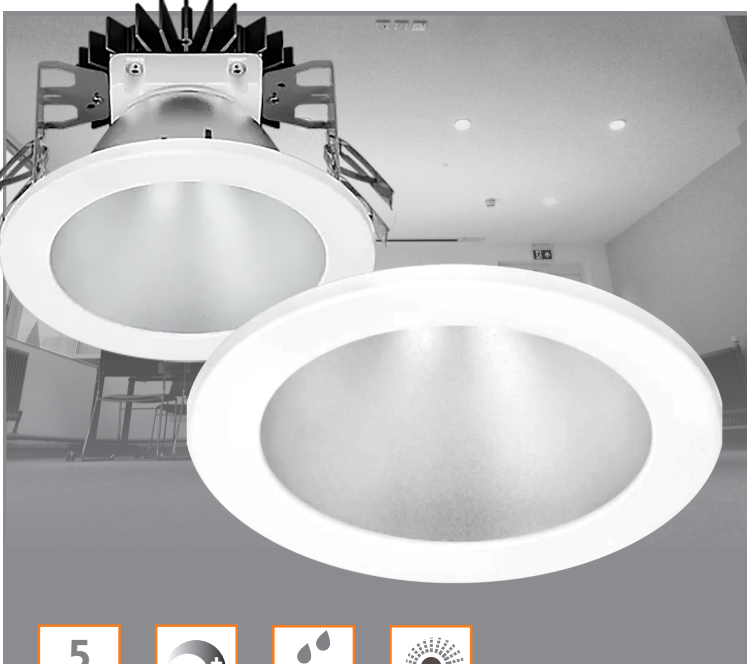

Dimensions & Weight

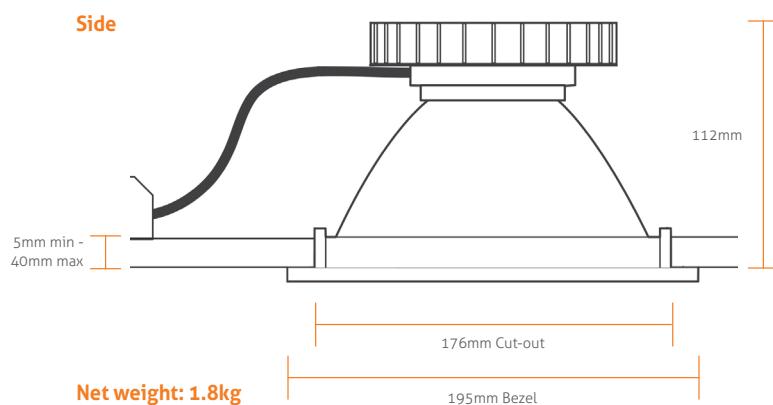

Features & Highlights

- IP30 ingress protection
- Tridonic Advance LED and Driver combination
- Low-glare UGR19 compliant
- Part L and ECA compliant efficacies
- Satin 60° reflector supplied as standard
- Decorative and IP65 bezel options
- 5 Year warranty (T's & C's apply)
- UK support

Options & Accessories

Emergency	/EM
DALI and Self-test EM	/DAEM
Emergency (integral indicator)	/EMI
DALI and Self-test EM (integral indicator)	/EMDI
50° multi-faceted reflector	/MF50
40° specular reflector	/SP40
SwitchDIM, DALI or DSI	/ECO
Casambi Bluetooth Wireless network	/BTC

Part Codes

Part Code	Description	Circuit Watts	Lumens	LU/CW	Colour Temp
POC-195-10-1100-SA60D-840-WHI	Poco 195mm Recessed Downlight 176mm Cutout 10w ~1,100Lm 110Lm/CW 60 Degree Satin Reflector CRI80 4000K White	10	~ 1,100Lm	110	840
POC-195-18-1900-SA60D-840-WHI	As above, 18w ~1,900Lm 105Lm/CW 4000K	18	~ 1900Lm	105	840
POC-195-30-2925-SA60D-840-WHI	As above, 30w ~2,925Lm 98Lm/CW 4000K	30	~ 2925Lm	98	840
POC-195-47-4550-SA60D-840-WHI	As above, 47w ~4,550Lm 98Lm/CW 4000K	47	~ 4550Lm	98	840

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.



Terms & Conditions

All goods supplied are subject to our Standard Terms of Business, available on request. E&OE.