


PRESTO

LED Down Light



Dimensions & Weight

Side

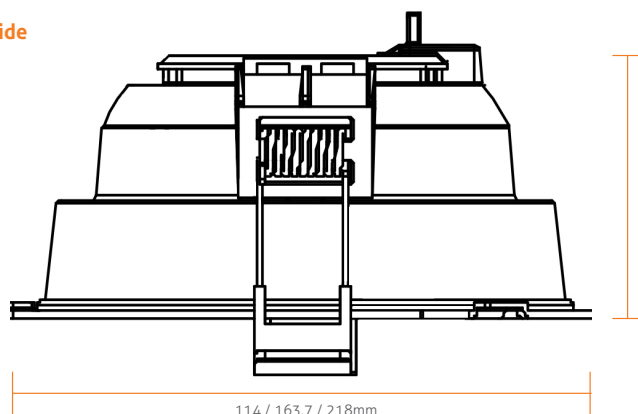

49.2 / 78 / 98mm

Net weight:
0.085kg/0.157kg/0.252kg

Features & Highlights

- IP20 ingress protection
- Compact ready to apply solution
- Comprises module, driver, reflector and trim ring
- Available in 114mm, 164mm and 208mm bezel size
- UGR19 for office installation
- Optional 60° and 90° reflector solution
- Emergency option with EM converter
- 5 Year warranty (T's & C's apply)
- UK support

Options & Accessories

60° reflector	/MF60
90° reflector	/MF90
Emergency - remote indicator	/EM
830 available on request	

Part Codes

Part Code	Description	Circuit Watts	Luminaire Lumens	Colour Temp	LL/cW
PRE-115-10-1030-840-WHI-TD	Presto 115mm Recessed Downlight 100mm Cutout 10w ~1,030Lm 103Lm/CW CRI80 4000K White	10	1030	840	110
PRE-165-10-1020-840-WHI-TD	As above, 165mm 150mm Cutout 10w 1,020Lm 102 Lm/CW	10	1020	840	110
PRE-165-20-2050-840-WHI-TD	As above, 165mm 150mm Cutout 20w 2,050Lm 102 Lm/CW	20	2050	840	110
PRE-220-20-2120-840-WHI-TD	As above, 220mm 200mm Cutout 20w 2,120Lm 104 Lm/CW	20	2120	840	110
PRE-220-30-3000-840-WHI-TD	As above, 220mm 200mm Cutout 30w 3,000Lm 100 Lm/CW	30	3000	840	110

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.



Terms & Conditions

All goods supplied are subject to our Standard Terms of Business, available on request. E&OE.

bblighting.co.uk

Version: 2501