

# PRIMA

## Anti-Corrosive Surface-Mounted Luminaire



### Features & Highlights

- IP65 Ingress protection
- IK08 Impact protection
- High efficacy
- Anti-distortion housing
- Improved thermals utilising aluminium back PCBs
- Opal, ribbed polycarbonate diffuser to reduce glare
- Stainless steel clips
- H3 – High output
- Polycarbonate grey body as standard
- Optional LED driver with motion and light detection
- 5 Year warranty (T's & C's apply)
- UK support


### Options & Accessories

Self Test Emergency /STEM  
Driver/Sensor /MW-STEPD



### Dimensions & Weight

Weight: 1.25/2kg

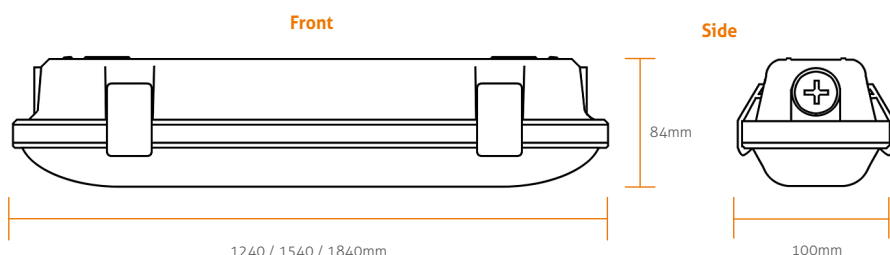

### Part Codes

Part Code	Description	Circuit Watts	Lumens	Colour	LL/cW
PRI-1.2-19-3050-840-IP65-PCG	Prima <b>1.2M</b> Non Corrosive Fitting <b>19W ~3,050Lm 167 Lm/CW</b> CRI80 4000K IP65 PolyCarb Grey	19	3,050	840	167
PRI-1.2-30-4800-840-IP65-PCG	As above, <b>30W ~4,800Lm 162 Lm/CW</b>	30	4,800	840	162
PRI-1.5-20-3200-840-IP65-PCG	As above, <b>1.5M 20W ~3,200Lm 162 Lm/CW</b>	20	3,200	840	162
PRI-1.5-43-6875-840-IP65-PCG	As above, <b>1.5M 43W ~6,875Lm 162 Lm/CW</b>	43	6,875	840	162
PRI-1.8-30-4800-840-IP65-PCG	As Above, <b>1.8M 30W ~4,800Lm 162 Lm/CW</b>	30	4,800	840	167
PRI-1.8-50-8000-840-IP65-PCG	As above, <b>1.8M 50W ~8,000Lm 162 Lm/CW</b>	50	8,000	840	164

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.



### Terms & Conditions

All goods supplied are subject to our Standard Terms of Business, available on request. E&OE.

[bblighting.co.uk](http://bblighting.co.uk)

Version: 2501