


RISOLUTO 1500

Linear Fitting with Variable Optics

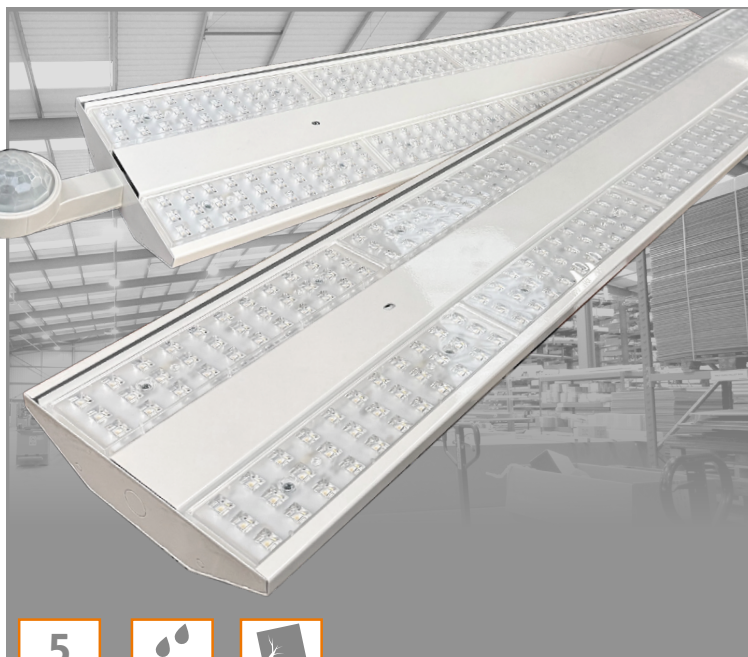


Features & Highlights

- IP40 Ingress Protection
- IK08 Impact Protection
- Variable Optics available
- Finished in RAL 9016 as standard
- Suspended or surface mount
- 5 Year warranty (T's & C's apply)
- UK support

Options & Accessories

Self Test EM	/STEM
Switching Only	/SW
Daylight Dimming	/DLD
60 Degree Optic	/60D
90 Degree Optic	/90D
High Rack Optic	/HR
High Bay PIR Sensor	/HBSN
Surface Mount Fixing Kit	/RIS-FIXKIT-Z

Dimensions & Weight

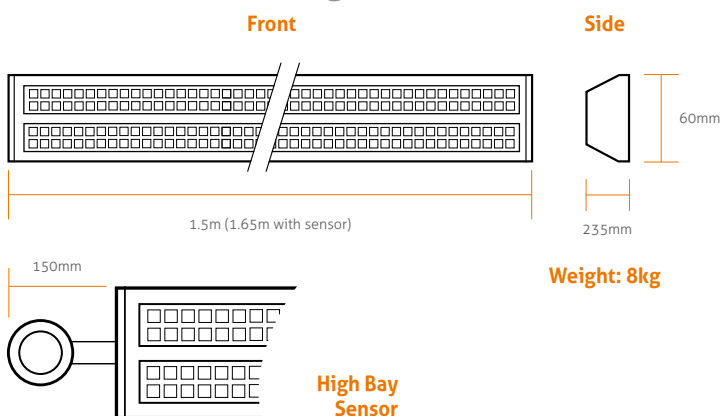

Part Codes

Part Code	Description	Watts	Lumens	LL/cW
RIS-1.5-200-29200-60D-840-HBSN-WHI	Risoluto 1.5M Linear 200w 60Degree Optic ~29,200Lm ~146Lm/CW 4000K CRI80 White +HighBay Sensor	200	29,200	143
RIS-1.5-200-29200-HR-840-HBSN-WHI	As above, High Rack Optic	200	29,200	143
RIS-1.5-170-24200-60D-840-HBSN-WHI	As above, 170w ~24,200Lm	170	24,200	143
RIS-1.5-170-24200-HR-840-HBSN-WHI	As above, 170w ~24,200Lm High Rack Optic	170	24,200	143

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.



Terms & Conditions

All goods supplied are subject to our Standard Terms of Business, available on request. E&OE.