

SUPERFICIE

Surface Downlight




Features & Highlights

- IP44 Ingress protection
- IK04 Impact protection
- Opal Polycarbonate diffuser
- Aluminium body
- Symmetrical wide beam light distribution
- DALI Dimming option
- UGR 22 Compliant
- 4000K colour temperature optional
- 5 year warranty (T's & C's apply)
- UK support

Options & Accessories

Description	Part code suffix
Self Test Emergency	/STEM
DALI	/DALI
White (RAL9016)	/WHI
Black	/BLK
Suspended version	/SUS

Dimensions

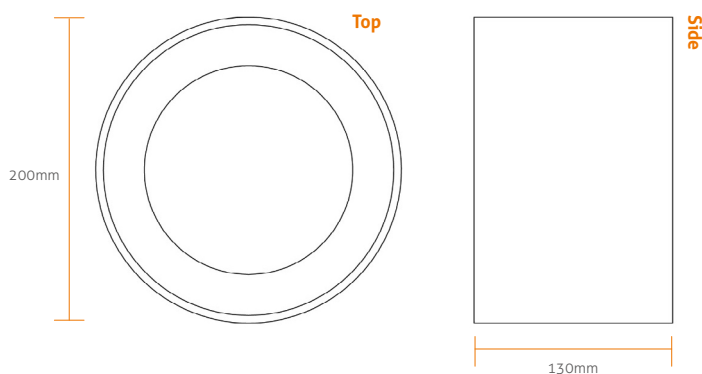

Part Codes

Part Code	Description	Circuit Watts	Lumens	Colour	LL/cW
SUP-200-12-1250-96DOD-830-130-WHI	Superficie Surface Downlight 200mm 12w ~1,250Lm ~105Lm/cW 96Degree Deepened Opal Diffuser CRI80 3000K 130mm White	12	1,250	830	105
SUP-200-16-1750-96DOD-830-130-WHI	As above, 16w, ~1,750Lm ~110Lm/cW 3000K	16	1,750	830	110
SUP-200-23-2450-96DOD-830-130-WHI	As above, 23w, ~2,450Lm ~105Lm/cW 3000K	23	2,450	830	105
SUP-200-12-1750-96DOD-840-130-WHI	As above, 12w, ~1,300Lm ~110Lm/cW 4000K	12	1,300	840	110
SUP-200-16-1850-96DOD-840-130-WHI	As above, 16w, ~1,850Lm ~115Lm/cW 4000K	16	1,850	840	115
SUP-200-23-2600-96DOD-840-130-WHI	As above, 23w, ~2,600Lm ~110Lm/cW 4000K	23	2,600	840	110

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.