

TANTO

Aluminium Profile Suspended or Surface Mount




Features & Highlights

- IP40 Ingress Protection
- IK05 Impact protection
- Low Glare PC Diffuser
- Microprismatic Opal
- Aluminium Profile
- Designed for In-line Connection
- Surface or Suspension Mounted
- 5 Year warranty (T's & C's apply)
- UK Support

Options & Accessories

DALI	/DALI
Self Test EM	/STEM
Integral Sensor	/EASN
Casambi Wireless	/CAS
Black (RAL9005)	/BLK
White	/WHI
Light Grey	/LGR
Suspension Kit	/SUSKIT

Technical Drawing

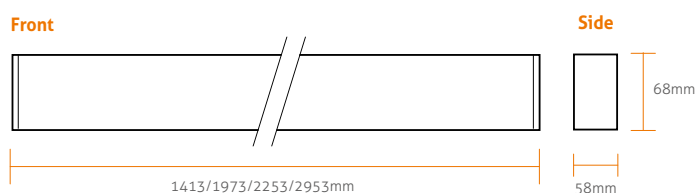

Part Codes

Part Code	Description	Watts	Lumens	Colour temp	LL/cW
TAN-STR-2000-60-70-21-2800-840-WHI	Tanto Straight Surface/Suspended Architectural Pendant ~1973mm x58mmx68mm 21w ~2812Lm ~133Lm/CW Opal Diffuser CRI80 4000K White	21	2810	840	133
TAN-STR-1400-60-70-48-5400-840-WHI	As above, ~1413mm long, 48W, 5391Lm, ~112Lm/CW	48	5391	840	112
TAN-STR-2250-60-70-49-6000-840-WHI	As above, ~2253mm long, 49W, 6021Lm, ~123Lm/CW	49	6021	840	123
TAN-STR-2950-60-70-64-6900-840-WHI	As above, ~2953mm long, 64W, ~6901Lm, ~108Lm/CW	64	6901	840	108

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.



Terms & Conditions

All goods supplied are subject to our Standard Terms of Business, available on request. E&OE.