

TEMPO

Suspension or surface-mounted batten





Features & Highlights

- IP20 ingress protection
- IK04 impact protection
- Available in 1.2m, 1.5m and 1.8m lengths
- Frosted, ribbed polycarbonate diffuser to reduce glare
- Improved thermals utilising aluminium back PCBs
- Push fit terminals & 20mm conduit entry
- H3 – High output emergency 440lm option available
- Additional screw to secure end cap
- 5 Year warranty (T's & C's apply)
- UK support

Options & Accessories

Self Test Emergency	/STEM
Low Bay Sensor	/LBSN
Suspension kit	/SUSKIT
White (RAL 2003)	/WHI

Dimensions & Weight

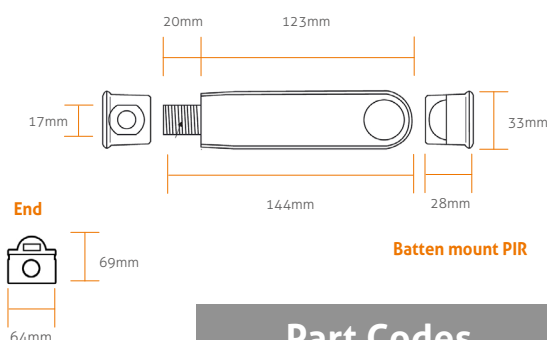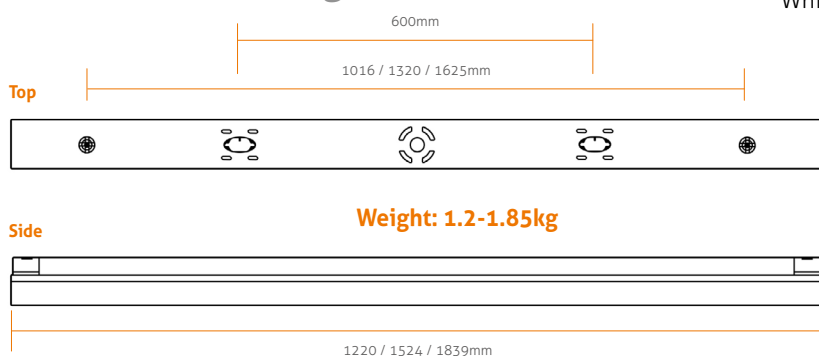

Part Codes

Part Code	Description	Circuit Watts	Luminaire Lumens	Colour	LL/cW
TEM-1.2-20-2750-840-WHI	Tempo 1.2M Batten 20w ~2,750Lm 137 Lm/CW CRI80 4000K IP20 Surface/Suspended White	19	~2,700	840	135
TEM-1.2-38-5050-840-WHI	As above, 38w ~5,050Lm 132 Lm/CW	38	~5,000	840	124
TEM-1.5-20-3200-840-WHI	As above, 1.5M 20w ~3,200Lm 160 Lm/CW	20	~3,200	840	160
TEM-1.5-43-6900-840-WHI	As above, 1.5M 43w ~6,900Lm 160 Lm/CW	43	~6,900	840	160
TEM-1.8-30-4800-840-WHI	As above, 1.8M 30w ~4,800Lm 160 Lm/CW	30	~4,800	840	160
TEM-1.8-60-7320-840-WHI	As above, 1.8M 60w ~7,320Lm 121 Lm/CW	60	~7,300	840	121

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.



Terms & Conditions

All goods supplied are subject to our Standard Terms of Business, available on request. E&OE.