


LODOS

Surface Mounted Decorative Luminaire



Technical Drawing

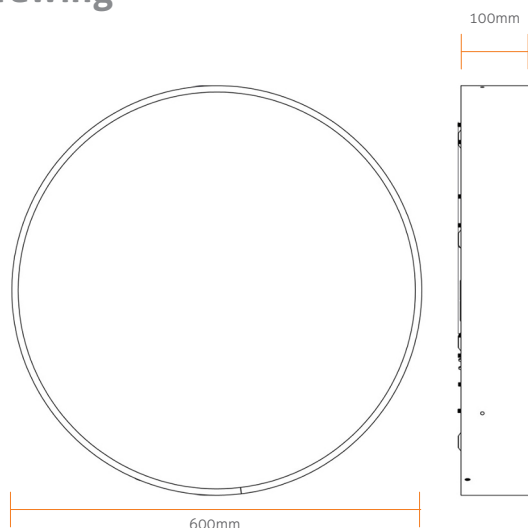

Net weight: 7.1kg

Features & Highlights

- Decorative fixture available in a range of colour finishes
- Steel housing
- Opal PMMA or microprismatic diffuser
- Available in a range of colour temperatures
- Decorative and IP65 bezel options
- Suspension kit available on request
- 5 Year warranty (T's & C's apply)
- UK support

Options & Accessories

DALI	/DALI
Emergency	/EM
Wire Suspension Kit	/SUSKit

Part Codes

Part Code	Description	Circuit Watts	Lumens	LL/Cw	Colour Temp
LOD-16-1920-830-0.6M	Lodos Surface Downlight 16W 1920Lm	16	~ 1920lm	120	830
LOD-16-1920-830-0.6M-STEM	Lodos Surface Downlight 16W 1920Lm +STEM	16	~ 1920lm	120	830

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.



Terms & Conditions

All goods supplied are subject to our Standard Terms of Business, available on request. E&OE.