


SOPRA

Backlit Low Glare MicroPrism Panel



Dimensions & Weight

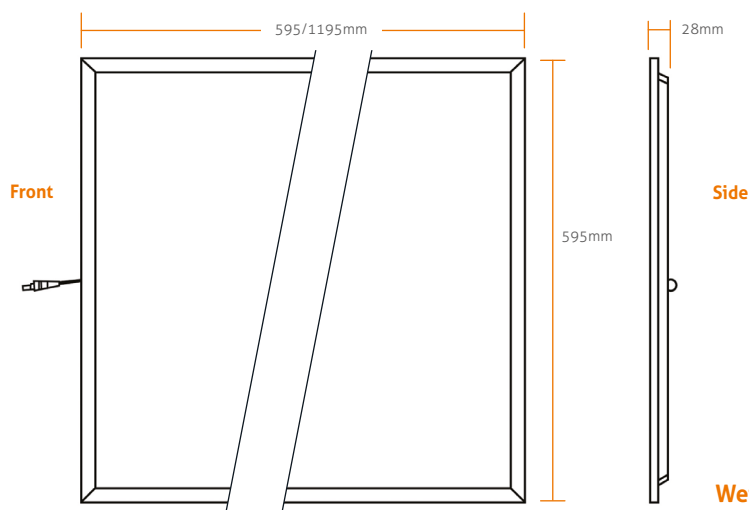

Weight: 1.45kg/3.34kg

Features & Highlights

- IP40 Ingress Protection
- IK04 Impact Protection
- DALI addressable
- Powder white finish
- Available as 600x600mm or 1200x600mm
- Extruded aluminium frame, aluminium back cover
- TPa Polycarbonate Microprismatic diffuser
- UGR19 Compliant
- 5 Year warranty (T's & C's apply)
- UK support

Options & Accessories

Self-test emergency	/STEM
DALI Dimming	/DALI
White (RAL9003)	/WHI

Part Codes

Part Code	Description	Circuit Watts	Lumens	Colour Temperature	LL/cW
SOP-6X6-28-3450-840-WHI-LU	Sopra 600x600 Back Lit Low Glare MicroPrism Panel TPa 28w ~3,450Lm ~123Lm/CW CRI80 4000K White	28	3,450	840	123
SOP-12X6-48-5750-83CCT-WHI-LU	As above, 1200x600 48w ~5,750Lm ~120Lm/CW CRI180 3000K/4000K/6000K	48	5,750	830/840/860	120

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.



Terms & Conditions

All goods supplied are subject to our Standard Terms of Business, available on request. E&OE.

bblighting.co.uk

Version: 2501