

# SOPRA DECORATIVE

Direct/Indirect 600 x 600 modular




## Features & Highlights

- Direct/indirect 600 x 600 LED modular
- Microprismatic central diffuser
- Philips LED and driver combination
- Life up to 100,000h L70/B10
- Low glare version for LG7 compliance
- No visible flicker (IEEE 1789 - 2015)
- Highly efficient ECA compliant versions
- 830 colour temp available on request
- Wireless, dimming and emergency options
- 5 Year warranty (T's & C's apply)
- UK Support

## Options & Accessories

DALI	/DALI
Bluetooth Wireless Enabled	/BTW
EM conversion c/w integral indicator	/EMI
Self test EM	/STEM
Frame for plasterboard ceilings	/PBF
Suspended mount body	/SUSKIT
Surface mount body	/SURKIT

## Technical Drawing

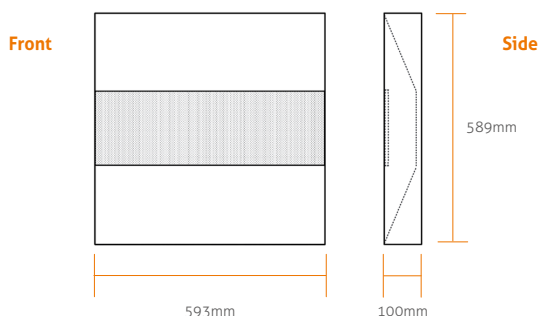

## Part Codes

Part Code	Description	Circuit Watts	Lumens	Colour	LL/cW
SOP-6X6-DID-32-3200-840-WHI	Sopra 600x600 Direct/InDirect Low Glare Microprism Panel TPb <b>32w ~3,200Lm ~100Lm/CW</b> CRI80 <b>4000K</b> White	32	3200	840	100
SOP-6X6-DID-31-3575-840-WHI	As above, <b>31w ~3,575Lm ~115Lm/CW</b>	31	3575	840	115
SOP-6X6-DID-32-5125-840-WHI	As above, <b>46w ~5,125Lm ~100Lm/CW</b>	46	5125	840	111

Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification.



## Terms & Conditions

All goods supplied are subject to our Standard Terms of Business, available on request. E&OE.

[bblighting.co.uk](http://bblighting.co.uk)

Version: 2501