

# SPICCATO

## Mini architectural downlight



### Key Features


- Tridonic SLE Advanced LED Light engine
- Multi-facet 40° injection moulded reflector
- Lumen maintenance L80/B10 @ >55,000 h
- Features low glare matt black baffle as standard
- Decorative and IP65 bezel options
- Emergency, DALI and Dimming options

### Options

Please select from the list below

Baffle colour	/WSB, GB
Reflective narrow beam	/NB
SwitchDIM, DALI or DSI	/ECO
Emergency	/EM

### Technical Drawing

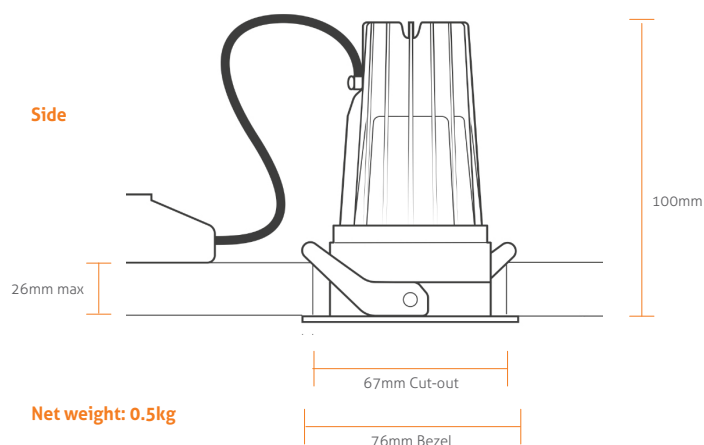

### Product Information

Part Code	Description	C. Watts	Lumens	Colour	LL/cW
SPI-67-5-650-MF40D-830-WHI	Recessed Downlight 67mm cutout 5w ~650Lm 130Lm/CW 40Degree Multi-faceted Reflector White	5	650	830	130

#### Terms & Conditions

All goods supplied are subject to our Conditions of Sale, copy available on request. E&OE.

[bblighting.co.uk](http://bblighting.co.uk)



Please note: Specification values may change due to rapid development of lighting technology. All performance data is taken at an ambient temperature of +25°C. Data may be rounded up/down for illustrative purposes. Tolerance range of optical and electrical data is +/-10%. We reserve the right to amend or change details without prior notification. E&OE.

Version: 01

Revision date: 13/1/24